JVC

SERVICE MANUAL

MULTI-POD

MP-P50U

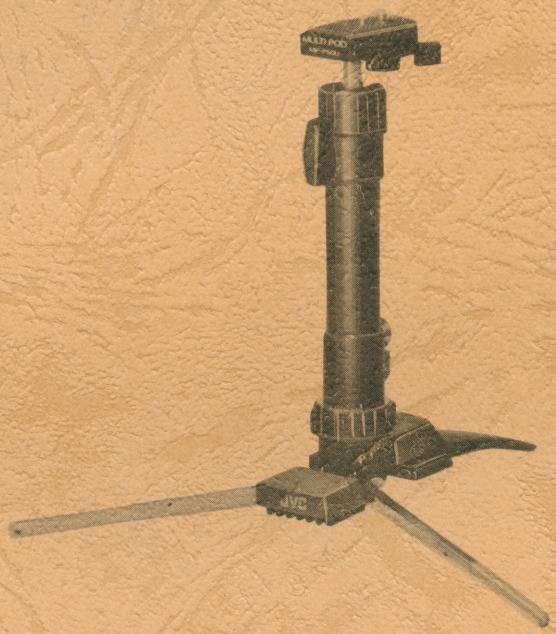

SPECIFICATIONS

Dimensions

Chest brace	: 292(W) x 206(H) mm (max.) (11-1/2" x 8-1/8")
Table-top stand	: 244(W) x 322(H) mm (max.) (9-5/8" x 12-11/16")
Clamp mount	: 102(W) x 310(H) mm (max.) (4-1/16" x 12-1/4")
Most compact arrangement	: 87(W) x 226(H) mm (3-7/16" x 8-15/16")
Weight	: 0.55 kg (1.21 lbs)

Design and specifications subject to change without notice.

No. 8349
December 1983

COPYRIGHT © 1983 VICTOR COMPANY OF JAPAN, LTD.

Parts identification

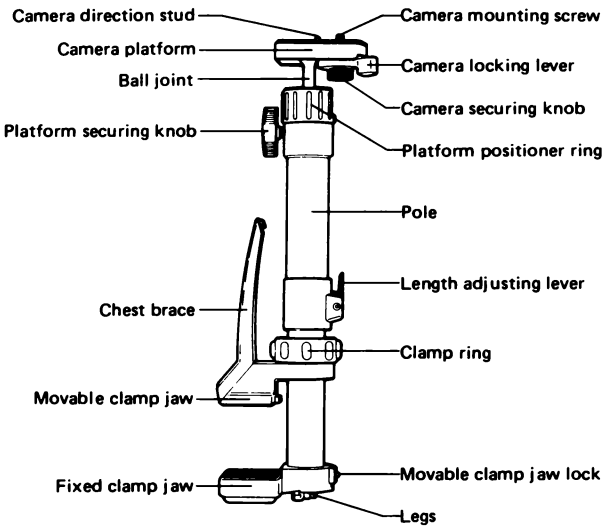

Notes
- Do not apply pressure from above when the legs are used.
- Make sure to use the table-top stand on a flat surface.
- Only clamp upon a sturdy surface that is less than 45 mm in thickness.
- Do not handle haphazardly when a camera is mounted.
- When panning or tilting with the MP-P50 being used as a clamp mount, be sure to loosen the platform securing knob.
- Do not apply thinner or other strong solutions to this unit.

Camera mounting possibilities

1. Chest brace

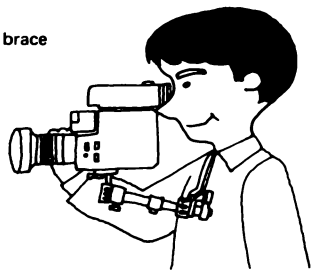

2. Table-top stand

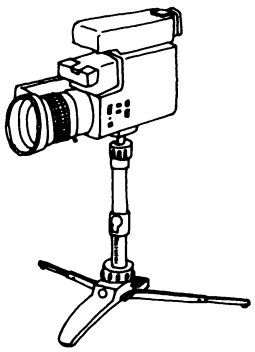

3. Clamp mount

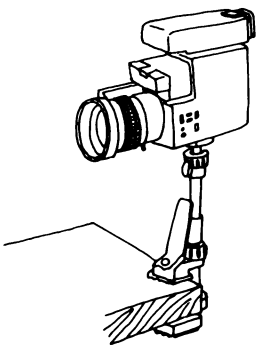

Using the MP-P50 as a chest brace

1) Pull back the length adjusting lever and extend the pole upwards. Next raise the movable clamp jaw approximately 1.5 cm (5/8").

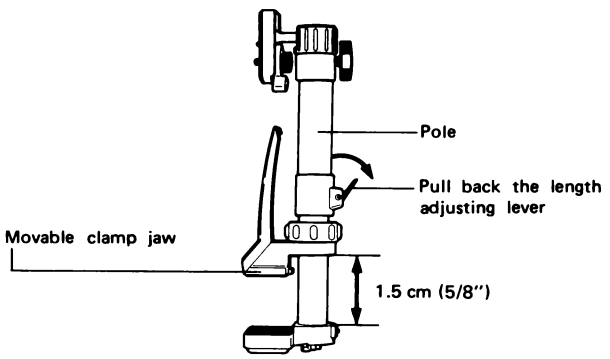

2) Rotate the movable clamp jaw approximately 120° in the direction as shown so it will slide past the base of the fixed clamp jaw.

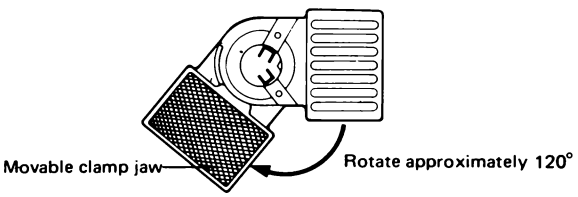

3) Next, slide the movable clamp jaw down to the base of the fixed clamp and rotate it in the direction of the arrow until it clicks into place.

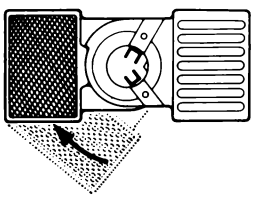

Turn until a click is obtained.

4) • After it is in the position as shown, rotate the chest brace 180°.
- To mount the camera, on page 8.
- While holding the camera steady, adjust the height of the pole to the desired level.

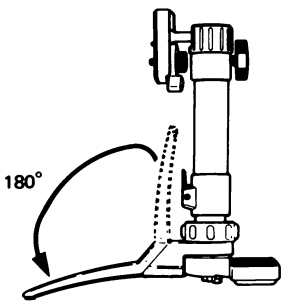

Using the MP-P50 as a table-top stand

1) Follow steps 1 – 4 on the preceding two pages.

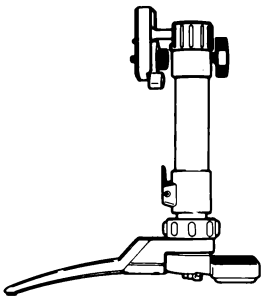

2) Next pull out the two legs from the base of the pole. Spread them fully apart and, while doing so, the end of the legs' extension will slightly protrude. Grasp them and swing them out.
To mount the camera see page 8.

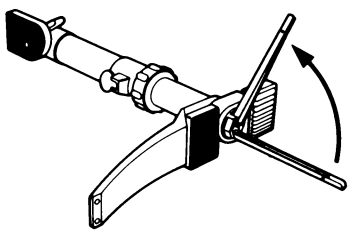

Using the MP-P50 as a clamp mount

1) Pull back the length adjusting lever and extend the pole upwards.

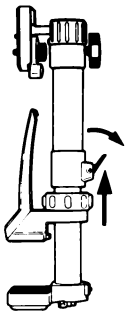

2) Lift the movable clamp jaw and place it over the edge of a sturdy surface.
Lower the pole while holding the fixed clamp jaw firmly against the bottom of the surface and press in the length adjusting lever to secure the clamp in place. Then tighten the clamp ring in the direction of the arrow printed on the movable clamp jaw.

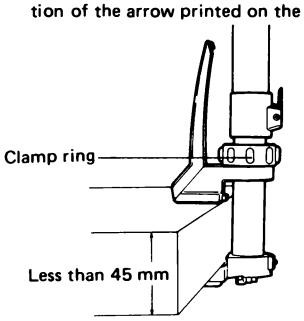

Note:
This multi pod is capable of clamping onto a surface of a maximum thickness of 45 mm.

To mount the camera see page 8.

Mounting a video camera

1) First raise the camera platform so it is in an upright position and turn the platform positioner ring in the direction of the arrow.
Note:
Place the camera platform in an upright position only when using the multi pod as a table-top stand or clamp mount.

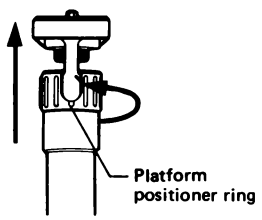

2) With the camera securing knob, lightly attach the camera onto the platform and use the securing lever to secure it firmly. To secure the platform in position, first position the platform then tighten the platform securing knob.



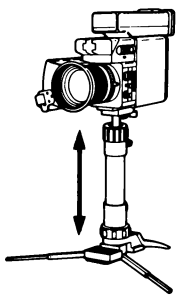

3) Extend the pole to the desired length and press in the length adjusting lever to secure it in place.

Specifications

Dimensions:

Chest brace	292(W) x 206(H) mm (max.) (11-1/2" x 8-1/8")
Table-top stand	244(W) x 322(H) mm (max.) (9-5/8" x 12-11/16")
Clamp mount	102(W) x 310(H) mm (max.) (4-1/16" x 12-1/4")
Most compact arrangement	87(W) x 226(H) mm (3-7/16" x 8-15/16")
Weight:	0.55 kg (1.21 lbs)

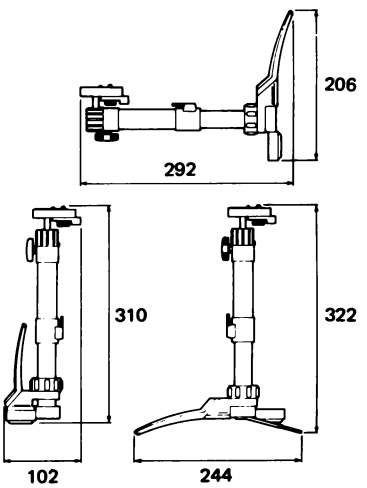

Design and specifications subject to change without notice.

● EXPLODED VIEWS AND PARTS LIST

1. Packing assembly

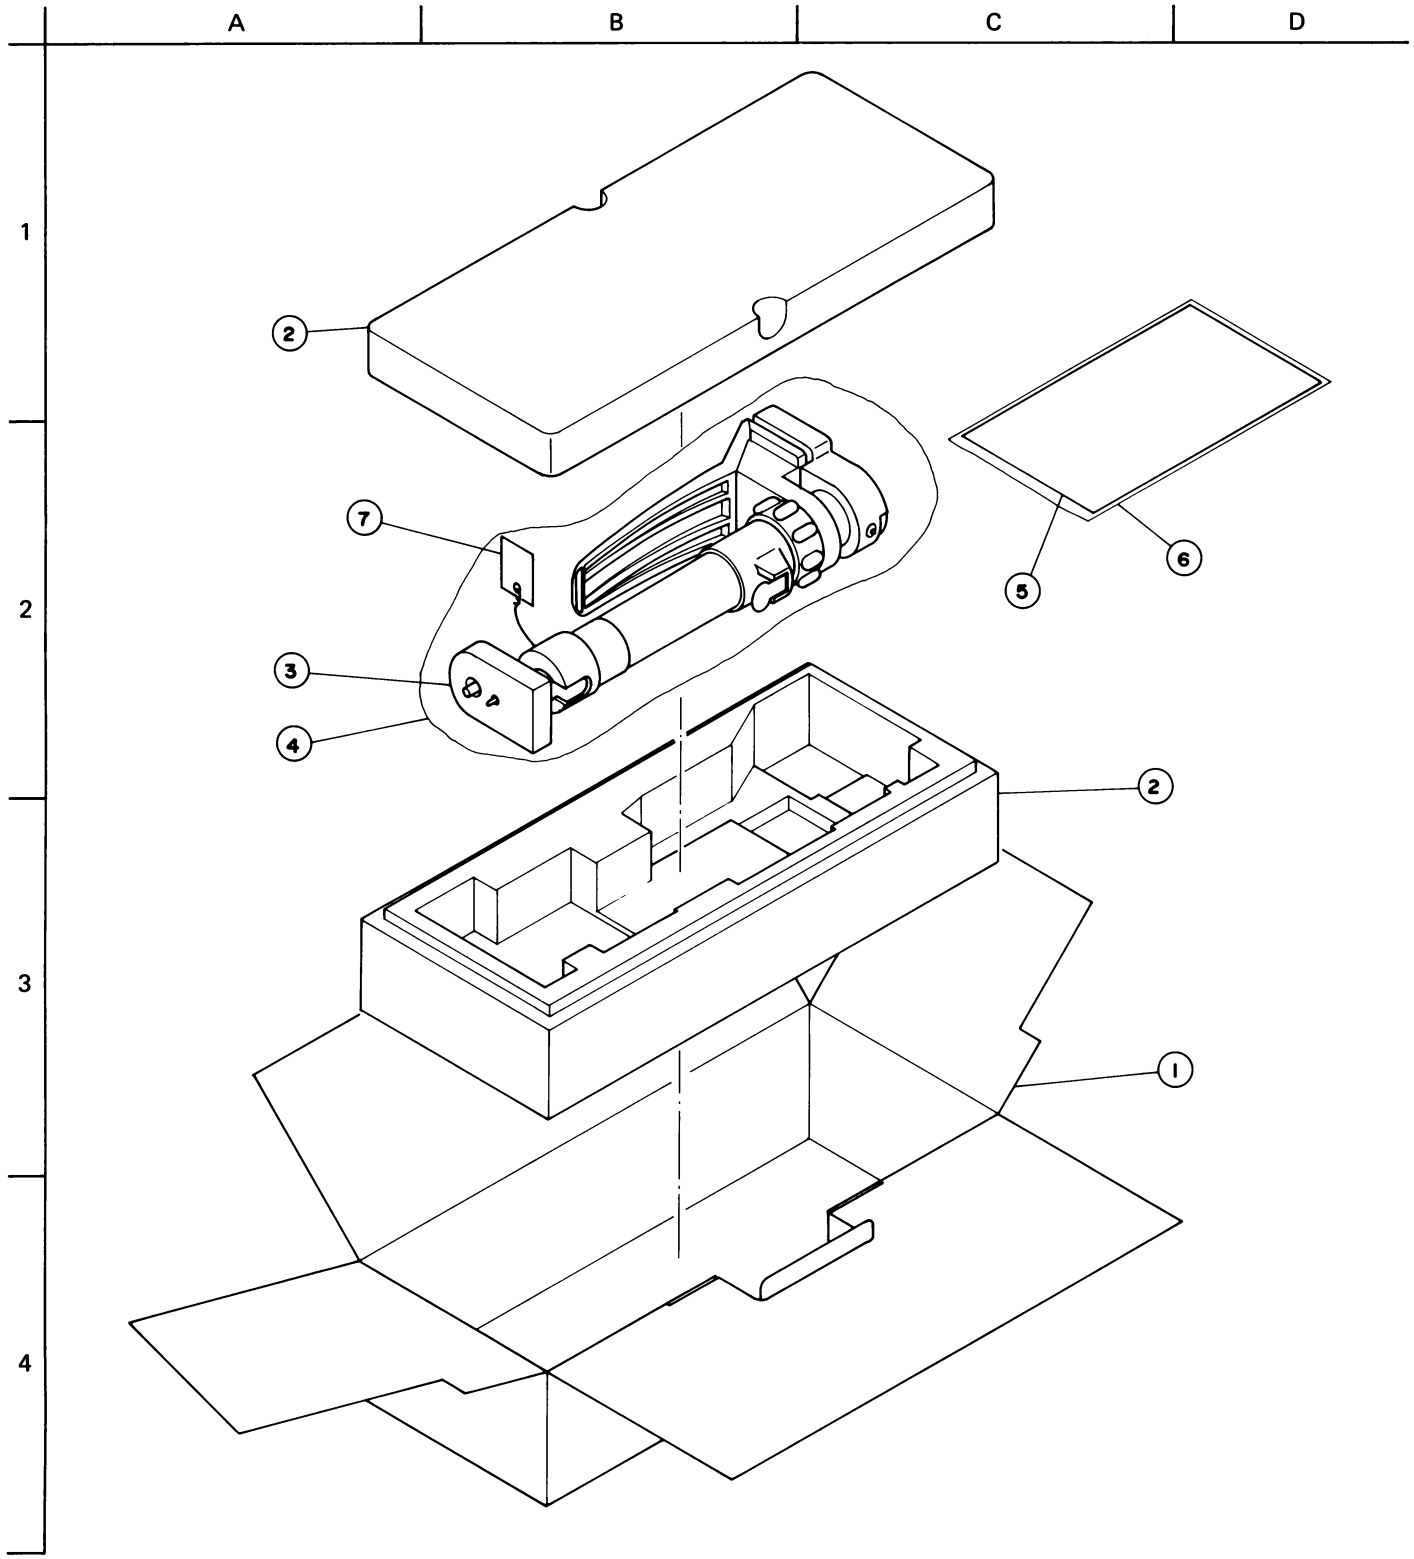

– Packing assembly parts list –

Symbol No.	Part No.	Part Name	Description	Q'ty	Symbol No. Position
1	PU56871-075	Packing Case	MP-P50U	1	3-D
2	" -068	Cushion Ass'y		1	1-A, 2-C
3	–	–		1	2-A
4	PU56871-067	Poly Bag		1	2-A
5	PU30425-639	Instructions		1	2-C
6	PU56871-070	Poly Bag		1	2-D
7	" -073	Caution Tag		1	2-A

2. Multi-Pod assembly

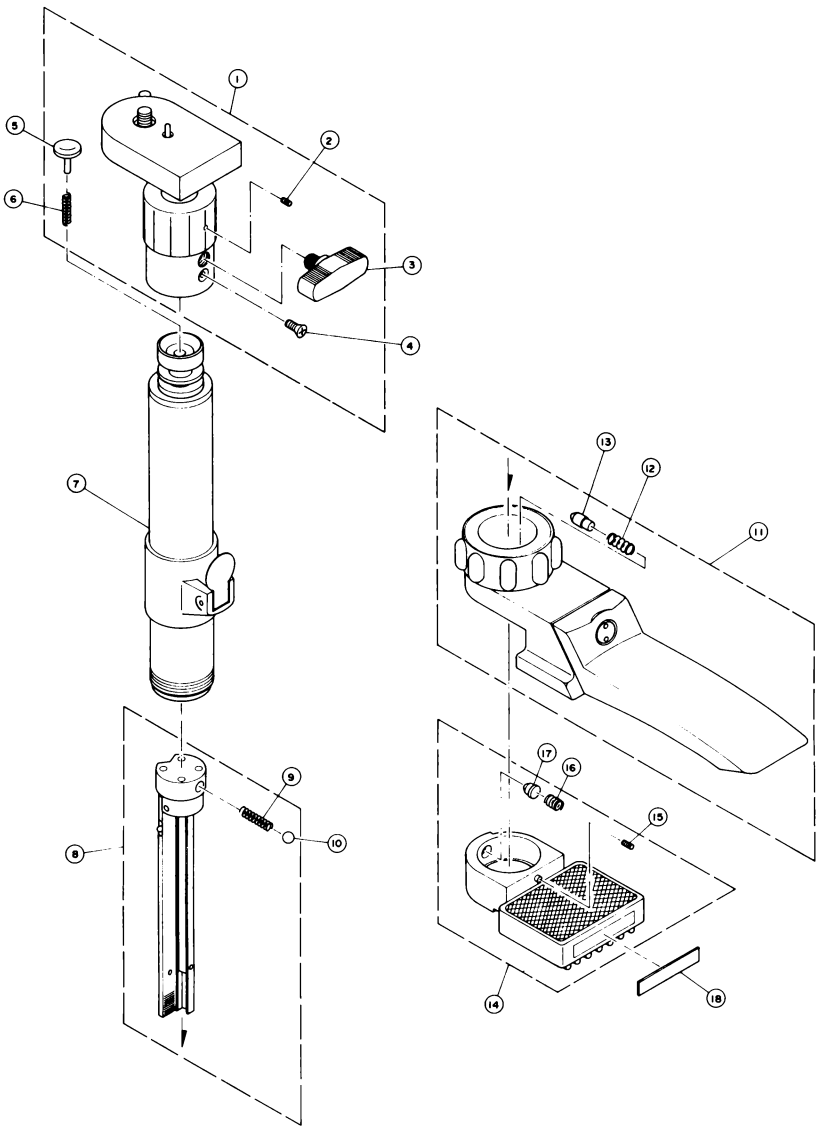

— Multi-pod assembly parts list —

Symbol No.	Part No.	Part Name	Description	Q'ty	Symbol No. Position
1	PU56871-102	Camera Plate Ass'y	Incl. ② – ⑥	1	1-B
2	YWS3006PS	Setscrew		1	1-B
3	PU56871-018	Fixing Handle		1	1-B
4	SHSP3008M	Screw		1	2-B
5	PU56871-016	Retainer		1	1-A
6	" -015	Spring		1	1-A
7	" -103	Pole Ass'y		1	2-A
8	" -106	Legs Ass'y	Incl. ⑨ , ⑩	1	3-A
9	" -036	Spring		1	3-B
10	" -063	Ball Bearing		1	3-B
11	" -104	Upper Clamp Ass'y	Incl. ⑫ , ⑬	1	2-C
12	" -041	Spring		1	2-C
13	" -043	Click Pin		1	2-C
14	" -105	Lower Clamp Ass'y	Incl. ⑮ – ⑰	1	3-C
15	YWS3004PS	Setscrew		1	3-C
16	PU56871-052	Spring		1	3-C
17	" -051	Stop Pin		1	3-C
18	PU49328-3	Name Plate		1	3-C

JVC

VICTOR COMPANY OF JAPAN, LIMITED.

Printed in Japan